

# TECHNICAL DATA

DIESEL GENERATING SET

MPMC POWERTECH CORP.


60HZ

## MPS100S-2E/ MPS100-2E

### Features

- Compact structure with high-strength chassis;
- Easy operation and maintenance, Low cost;
- Excellent performance damping system;
- Compliance with international electrical safety standards of electrical system;
- 8 hours base tank;
- High-performance maintenance-free batteries with isolation switch
- 50°C Radiator;
- Top lifting, Forklift bottom hole design, easy to transport;
- Industrial muffler;
- Noise reduction structure , Low noise;
- Convenient power output interface;
- IP56 (control system)
- Customized design for user
- Structure optional: Open (MPS100-2E)  
Sound-proof ( MPS100S-2E)

Reference images, the actual shall prevail

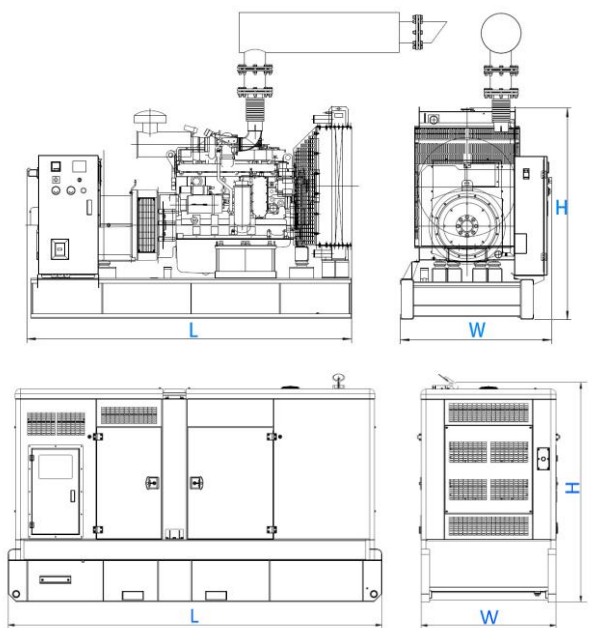

Genset Technical Data	
Output frequency	60 HZ
Rated speed	1800 rpm
Prime power	91 KW
Standby power	100 KW
Rated voltage	480 V
Phase	3
Noise dB(A) @7m	70
Engine model	1104D-E44TAG2
Alternator model	UCI 274C
Fuel consumption of 100% load	27.7 Litres/h
Fuel consumption of 75% load	22.0 Litres/h
Voltage regulation rate	≤±1%
Random voltage variation	≤±1%
Frequency regulation rate	≤±5%
Random frequency variation	≤±0.5%

Dimension and Weight			
Generating set model	MPS100S-2E	MPS100-2E	
Length(L) (mm)	3200	2600	
Width(W) (mm)	1130	850	
Height(H) (mm)	1750	1350	
Dry weight (k g)	1580	1200	
Tank capacity ( L )	280	200	

<b>Engine Specifications</b>			
Engine model	1104D-E44TAG2		
Engine manufacturer	PERKINS		
Number of cylinders	4		
Cylinder arrangement	Vertical in-line		
Cycle	Four stroke		
Aspiration	Turbocharged,air-air charge cooled		
Bore Stroke (mm mm)	105 x 127		
Displacement (Liter)	4.41		
Compression Ratio	16.2:1		
Prime power/speed	100 KW / 1800rpm		
Standby power/speed	111 KW / 1800rpm		
Speed governor	Electrical		
Cooling system	Forced Water Cooling Cycle		
Steady speed droop (%)	≤1%		
Total lubrication system capacity (L)	8.0		
Coolant capacity (L)	17.0		
Fuel consumption at 100% load (g/kWh)	216.3(at 1800RPM)		
Starter motor	DC 12V		
Alternator	DC 12V		
<b>Alternator Specifications</b>			
Alternator model	UCI 274C		
Rated output prime power	100 kW		
Efficiency (%)	91.1%		
Rated speed	1800 RPM		
Rated frequency	60 Hz		
Phase	3		
Rated voltage	480 V		
Exciter type	self <a href="#">excited</a> ., Brushless		
Power factor	0.8		
Voltage adjust range	≥5%		
Voltage regulation NL-FL	≤±1%		
Insulation grade	H		
Protection grade	IP23		
Xd DIR. AXIS SYNCHRONOUS	2.30		
X'd DIR. AXIS TRANSIENT	0.20		
X''d DIR. AXIS SUBTRANSIENT	0.13		
Xq QUAD. AXIS REACTANCE	1.32		
X''q QUAD. AXIS SUBTRANSIENT	0.19		
<b>Optional</b>			
Optional Alternator brand	Leroy Somer	MECC	MPMC
Optional Alternator model	LSA 44.2 VS45	ECP34-2S/4	LYG274B
Rated output prime power	105KW	100.8KW	100KW

## Control System

### NSM-225-3110 (Standard)

All MPMC Gensets have a control cabinet (the Deepsea control module DSE3110 as standard) mounted on

#### Main Features

- Manual and automatic mode
- Parameter configuration via RS-232 serial communication
- Remote control automatic start/shutdown
- Optional ECU control
- Optional CAN engines
- Optional speed sensor access
- PLC programming
- Operating temperature: -20°C to 70°C
- IP56 Rating
- Back-lit icon LCD display
- Power Save mode
- CAN and Magnetic Pick-up/Alt. versions available (specify on ordering)
- PC configurable
- 6 Digital inputs
- 4 Outputs (2 configurable on Magnetic Pick up/Alt., 4 configurable)

#### The control module display

- Generator voltage
- Generator frequency
- Battery voltage
- Engine speed
- Load current
- Engine run-time Hours
- Engine oil pressure (Panel Meter)
- Engine coolant temperature (Panel Meter)



#### Protecting Functions

- Over frequency / under frequency
- Over voltage / under voltage
- Over current
- Over speed /under speed
- Emergency stop
- Low oil pressure
- High water temperature
- Failure to start/Failure to stop
- Battery charger failure
- Comprehensive shutdown or warning on fault condition

## Control System

### NSM-225-7320 (Optional)

NSM-100-7320 is an advanced control module based on micro-processor, It is an Auto Mains (Utility) Failure Control Module(AMF), have been designed to start and stop generating sets that include electronic And non-electronic engines. Include the additional capability of being able to monitor a mains (utility) supply. when main is not available, It can automatically start the engine and close generating sets breaker automatically, Accurately measure various operational parameters and display all values and alarms information on the LCD. In additional, it can automatically open breaker, and shutdown the engine after the main supply recovers.

### Main Features

- AMF and ATS and communication and expansion function
- Designed to work with electronic or non-electronic or gas engine simultaneously. (support many kinds of engines ECU).
- Manual, Automatic, Test and remote control mode selectable.
- Monitoring and measuring operational parameters of the mains supply and genset.
- Indicating operation status, fault conditions, all parameters and alarms
- Multiple protections and multiple parameters display.
- Includes 12 inputs and eight outputs. 8 inputs are configurable and 4 outputs are configurable.
- Can be programmed using the front panel or by using the PC software.
- Support twelve languages. The language was edited by customer.
- Graded protection: pre-alarm, shutdown and electrical trip, flexible setting.
- The module can be pre-set for four operating modes and protecting parameters.
- Add DSE860 or DSE865 module, internet network monitoring can be realized.
- The firmware can be updated automatically, so customer can have the latest version.



### The control module display

- Generator voltage
- Generator frequency
- Battery voltage
- Engine speed
- Load current
- Generator KVA, KW, PF
- Engine run-time Hours
- Engine oil pressure
- Engine coolant temperature
- Real time clock for time and date, overall runtime

## Optional

### Engine

- Water Jacket Preheater
- Fuel-water separator
- Oil pump
- Oil preheater
- Battery preheater

### Alternator

- PMG excitation
- Space heater
- Winding Temperature Measuring

### Generator Set

- Tools with the machine
- Coolant (-30°C)

### Control System

- AMF function
- ATS control cabinet
- Double-frequency and double voltage
- Single phase
- ABB MCCB

### Fuel System

- 12 / 24 hour base tank (single wall)
- Dual wall base fuel tank
- Outside fuel tank
- Automatic fuel feeding
- Fuel level indicate

### Canopy

- Hired type
- Economy Oil heater
- Trailer

## Contact Us

### MPMC POWERTECH CORP.

Add: No. 111 Luda Rd., Luyuan Industrial Zone, Pudong Shanghai China

Tel: +86 21 60970158 Fax: +86 21 60970155

Mobile: +86-18621857018 (Robert)

E mail : [sales@mpmc-china.com](mailto:sales@mpmc-china.com)


Web site : [www.mpmc-china.com](http://www.mpmc-china.com)



MPMC reserves the right to make changes in model, technical specification, color, configuration and accessories without prior notice.

Please contact the salesman before ordering.

DISTRIBUTED BY:

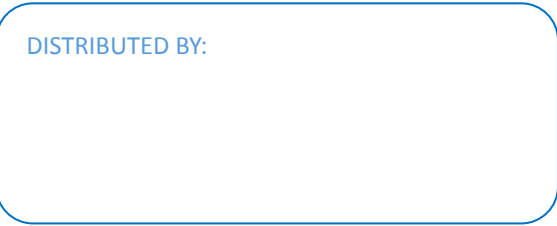

© 2013 by MPMC, All right reserved.



ISO9001:2008  
MPMC Generating Sets

