



TECHNICAL DATA

DIESEL GENERATING SET

MPMC POWERTECH CORP.

50HZ

MC Series



MCS1500S-1 / MCS1500-1

MCS1500S-1 / MCS1500-1

Features

- Compact structure high-strength chassis
- Easy operation and maintenance, Low cost
- Good performance damping system
- Compliance with international electrical safety standards of electrical system
- High-performance maintenance-free batteries with isolation switch
- 50°C radiator (Optional)
- Top lifting, Forklift bottom hole design, easy to transport
- Industrial type muffler
- Noise reduction structure , Low overall noise
- Convenient power output interface and ATS Interface
- IP56 (control system)
- The personalized design for user
- Structure type genset Optional: Open (MCS1500-1)
Sound-proof (MCS1500S-1)

Reference images. the actual shall prevail

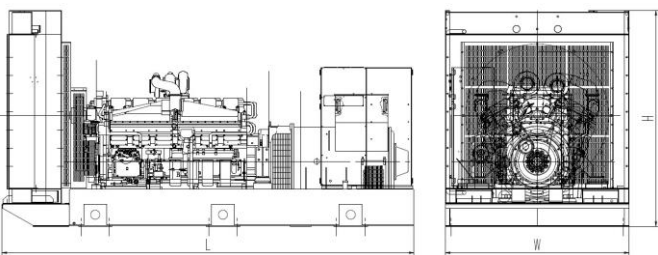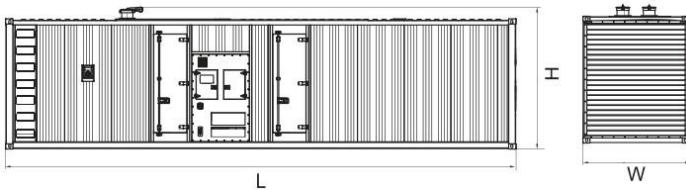

Genset Technical Data

Output frequency	50 HZ
Rated speed	1500 rpm
Prime power	1500 KVA
Standby power	1650 KVA
Rated voltage	400 V
Phase	3
Noise dB(A) @7m	78
Engine model	KTA50-GS8
Alternator model	PI 734C
Fuel consumption of 100% load	309 Litres/h
Fuel consumption of 75% load	238 Litres/h
Voltage regulation rate	≤±1%
Random voltage variation	≤±1%
Frequency regulation rate	≤±5%
Random frequency variation	≤±0.5%

Dimension and Weight

Generating set model	MCS1500S-1	MCS1500-1
Length(L) (mm)	40' Spc Container	5350
Width(W) (mm)	40' Spc Container	2260
Height(H) (mm)	40' Spc Container	2570
Dry weight (k g)	11500	9120
Tank capacity (L)	N.A.	N.A.

Engine Specifications			
Engine model	KTA50-GS8		
Engine manufacturer	Cummins		
Number of cylinders	16		
Cylinder arrangement	60° Vee		
Cycle	Four stroke		
Aspiration	turbo-charged & after-cooled		
Bore Stroke (mm mm)	159 x 159		
Displacement (Liter)	50.3		
Compression Ratio	14.9:1		
Prime power/speed (kW/RPM)	1287 /1500rpm		
Standby power/speed (kW/RPM)	1429 /1500rpm		
Speed governor	Electrical		
Cooling system	Forced Water Cooling Cycle		
Steady speed droop (%)	≤1%		
Total lubrication system capacity (L)	204		
Coolant capacity (L)	165		
Fuel consumption at 100% load (g/kWh)	204(at 1500RPM)		
Starter motor	DC24V		
Alternator	DC24V		
Alternator Specifications			
Rated frequency	50 Hz		
Rated speed	1500 rpm		
Alternator model	PI 734C		
Rated output prime power	1550kVA		
Efficiency (%)	95.4%		
Phase	3		
Rated voltage	400 V		
Exciter type	Separated excited by P.M.G, Brushless		
Power factor	0.8		
Voltage adjust range	≥5.0%		
Voltage regulation NL-FL	≤±1.0%		
Insulation grade	H		
Protection grade	IP23		
Xd DIR. AXIS SYNCHRONOUS	2.96		
X'd DIR. AXIS TRANSIENT	0.18		
X''d DIR. AXIS SUBTRANSIENT	0.13		
Xq QUAD. AXIS REACTANCE	1.91		
X''q QUAD. AXIS SUBTRANSIENT	0.27		
Optional			
Optional Alternator brand	Leroy Somer	mecc alte	MPMC
Optional Alternator model	LSA 50.2 L8	ECO46-1S/4	LYG 454C
Exciter type	Self-excited	Self-excited	excited by P.M.G
Rated output prime power	1500KVA	1500KVA	1550KVA

Control System

NA1-3200-7320

NSM-100-7320 is an advanced control module based on micro-processor, It is an Auto Mains (Utility) Failure Control Module(AMF), have been designed to start and stop generating sets that include electronic And non-electronic engines. Include the additional capability of being able to monitor a mains (utility) supply. when main is not available, It can automatically start the engine and close generating sets breaker automatically, Accurately measure various operational parameters and display all values and alarms information on the LCD. In additional, it can automatically open breaker, and shutdown the engine after the main supply recovers.

Main Features

- AMF and ATS and communication and expansion function
- Designed to work with electronic or non-electronic or gas engine simultaneously. (support many kinds of engines ECU).
- Manual, Automatic, Test and remote control mode selectable.
- Monitoring and measuring operational parameters of the mains supply and genset.
- Indicating operation status, fault conditions, all parameters and alarms
- Multiple protections and multiple parameters display.
- Includes 12 inputs and eight outputs. 8 inputs are configurable and 4 outputs are configurable.
- Can be programmed using the front panel or by using the PC software.
- Support twelve languages. The language was edited by customer.
- Graded protection: pre-alarm, shutdown and electrical trip, flexible setting.
- The module can be pre-set for four operating modes and protecting parameters.
- Add DSE860 or DSE865 module, internet network monitoring can be realized.
- The firmware can be updated automatically, so customer can have the latest version.



The control module display

- Generator voltage
- Generator frequency
- Battery voltage
- Engine speed
- Load current
- Generator KVA, KW, PF
- Engine run-time Hours
- Engine oil pressure
- Engine coolant temperature
- Real time clock for time and date, overall runtime

Optional

Engine

- Water Jacket Preheater
- Fuel-water separator
- Oil pump
- Oil preheater
- Battery preheater

Alternator

- PMG excitation
- Space heater
- Winding Temperature Measuring

Generator Set

- Tools with the machine
- Coolant (-30°C)

Control System

- AMF function
- ATS control cabinet
- Double-frequency and double voltage
- Single phase
- ABB MCCB

Fuel System

- 12 / 24 hour base tank (single wall)
- Dual wall base fuel tank
- Outside fuel tank
- Automatic fuel feeding
- Fuel level indicate

Canopy

- Hired type
- Economy Oil heater
- Trailer

Contact Us

MPMC POWERTECH CORP.

Add:No.111 Luda Rd., Luyuan Industrial Zone, Pudong Shanghai China

Tel: +86 21 60970158 Fax: +86 21 60970155

Mobile: +86-18621857018 (Robert)

E mail : sales@mpmc-china.com

Web site : www.mpmc-china.com



MPMC reserves the right to make changes in model, technical specification, color, configuration and accessories without prior notice.

Please contact the salesman before ordering.

DISTRIBUTED BY:

© 2013 by MPMC, All right reserved.



ISO9001:2008
MPMC Generating Sets

